


**Lead Horse**

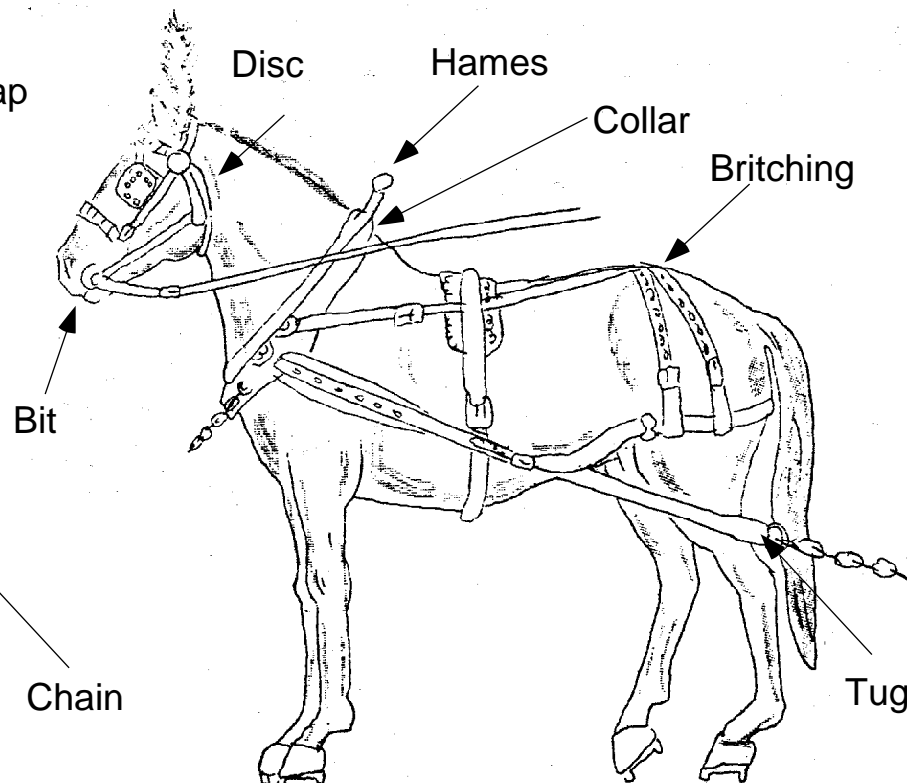

**Wheel Horse**

### Notes

The wheel horses have britching, all other have a tug strap and croup. The wheel horse acts as a brake as well as the ability to turn the wagon.

### Suggested Harness Materials

Bit - Two brass rings connected by a wire.

Hames - Wire or wood, shaped and topped off with a bead.

Collar - Carved on horse or made of leather.

Leather Parts - All other leather parts of harness can be made from black photo tape cut to size. This tape has one side tacky so it is easy to keep in place. It can be doubled back on itself to hold rings, chain, etc. It also can be painted.

Discs - Can be made from pins, cut and driven into the horse to hold the harness.

### Special Note

***This plan includes all the information included on Plan 129. Plan 129 has been discontinued.***

### Draft Horse Harness

DATE: 1954

SCALE: 1/2" = 1'

SCANNED & REVISED:  
11/08/01


Pg 1 of 2

## Circus Model Builders

Drawn By  
J. W. Mackay

DRAWING NUMBER

**#0083**

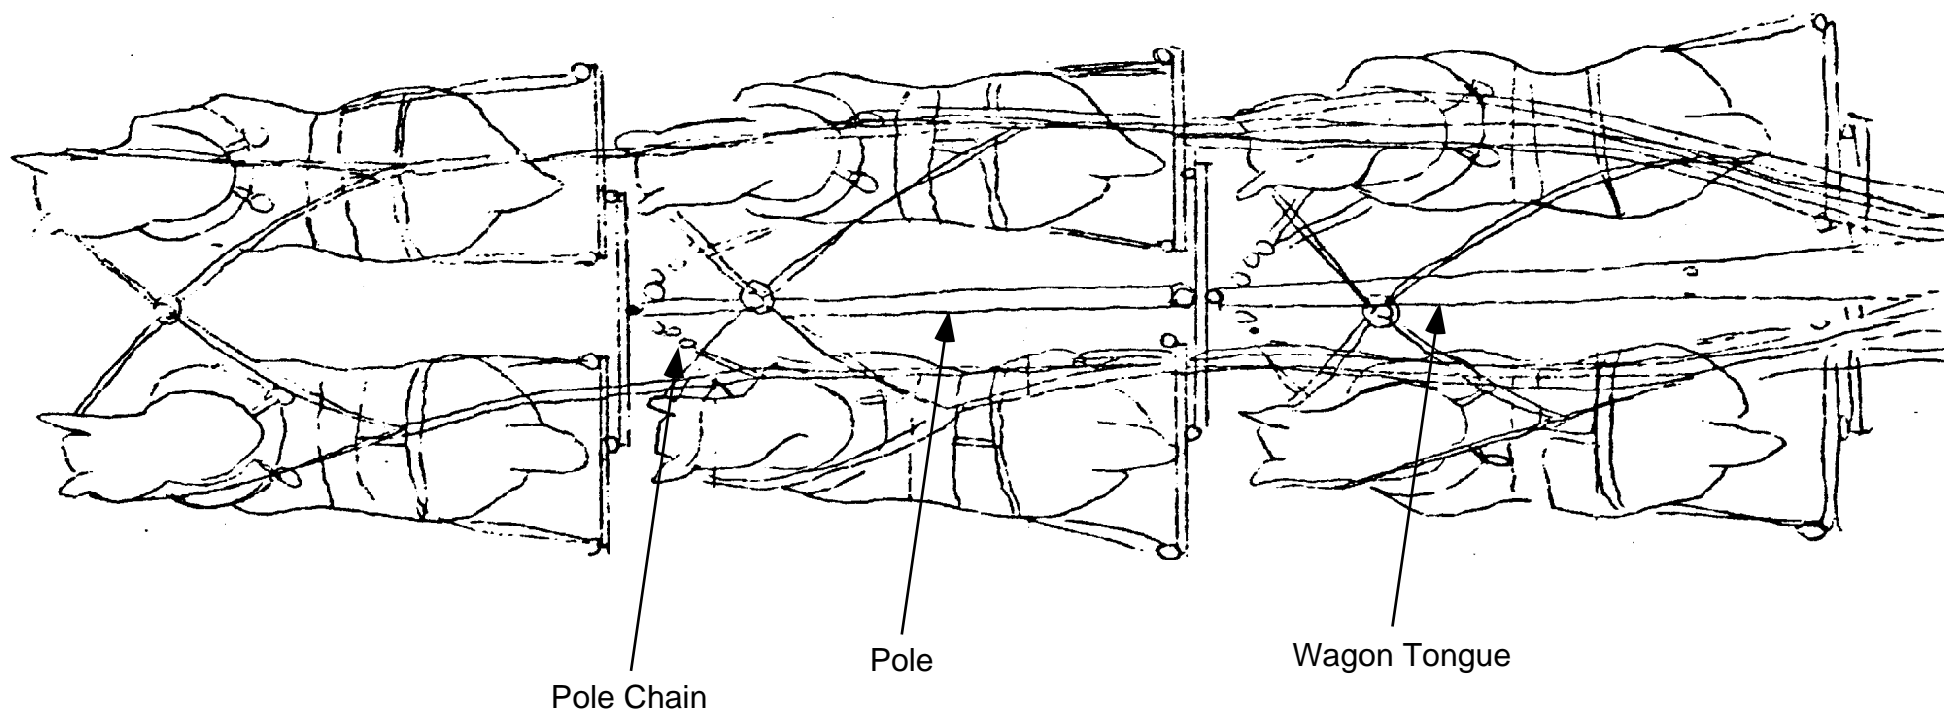

## A Six Horse Hitch

For an eight or ten or more horse hitch add more horses and poles as needed.

Each team has a pole except the lead team.

Each team, including the lead team has a set of single and double trees.

There is one rein for each two horses, each rein dividing into a fork and crossing over to the opposite horse in each team. At the place where the reins cross, they pass through a small metal ring. Each team except the lead team is hitched to the front end of its pole with pole chains fastened to the collar.

### Draft Horse Harness

DATE: 1954

SCALE: 1/2" = 1'

SCANNED & REVISED:  
11/08/01

Pg 2 of 2

# Circus Model Builders

Drawn By  
J. W. Mackay

DRAWING NUMBER

**#0083**